4-Way Humidity Indicator

AMAZON CASES

DRG No	THIRD ANGLE PROJECTION
BL/D 9188/01 INST	REMOVE ALL SHARP EDGES UNLESS SPECIFIED — DO NOT SCALE — ASK
USED ON	

BASIC SCALE: 0 5 10 20 30 40 50 60 70 mm / 0 0.5 1 2 3 INS

NOTES:

1. SPECIFICATIONS:

1.1 THIS HUMIDITY INDICATOR PLUG MEETS THE REQUIREMENTS OF SAE AS26860 TYPE II FOR MOUNTING THRU A ø1.05 HOLE.

[1.2] RELATIVE HUMIDITY OF AIR IS INDICATED BY 20, 30, 40 AND 50 PERCENT SPOTS ON INDICATOR CARD. BLUE SPOT INDICATES RH IS LESS THAN NUMBER ON CARD. PINK OR WHITE SPOT INDICATES RH IS EQUAL TO OR GREATER THAN NUMBER SHOWN ON CARD. INDICATOR COLOR CHANGE IS REVERSIBLE.

2. MATERIALS AND FINISH:

[2.1] HOUSING, HEX NUT, WASHER, AND LOCKSCREW; BRASS PER QQ–B–626.

[2.2] FINISH; BRASS ZINC PLATED IAW QQ–Z–325, TYPE I, CLASS 2.

2.3 INDICATOR CARD; CHEMICALLY IMPREGNATED BLOTTER PAPER PER MIL–I–8835.

2.4 GASKETS; PER MIL–R–6855, CL.II, GR. 60.

2.5 WINDOW; PLEXIGLAS PER MIL–P–5425.

3.0 REPLACEMENT INDICATOR CARDS MAY BE ORDERED AS P/N BL/D9192/01.

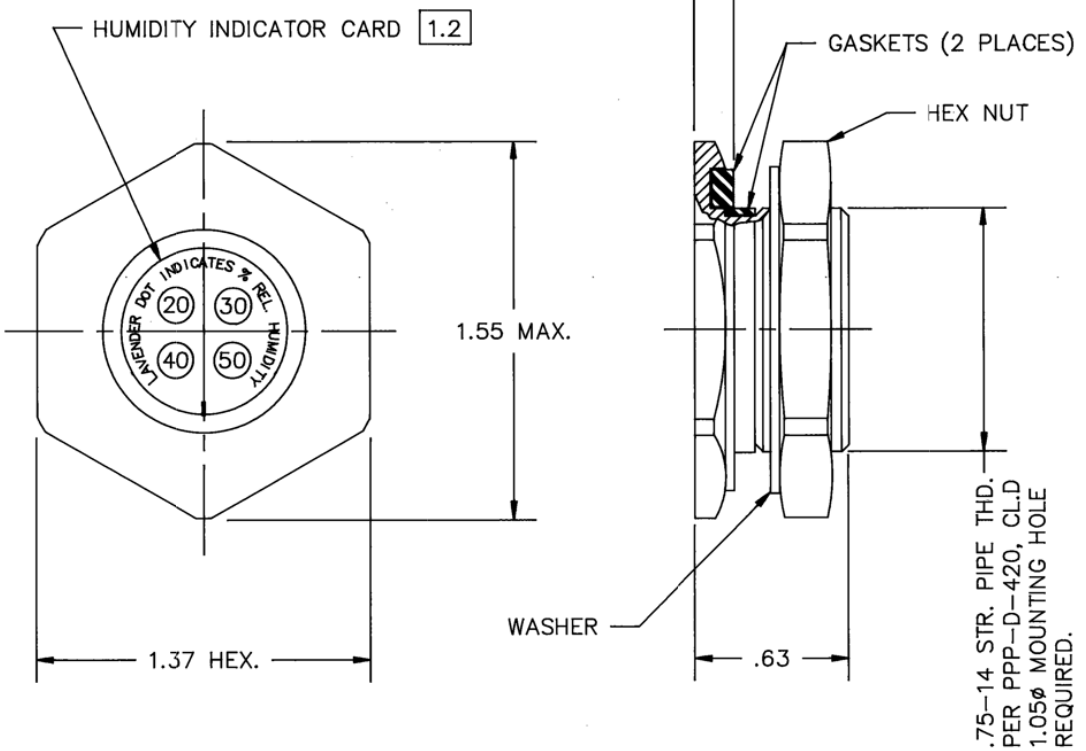

CHANGE	MOD No	ISSUE	DATE
		A	7/3/02

MATERIAL	PROTECTIVE FINISH	TOLERANCES	CUSTOMER	CUSTOMER'S REF	DRAWN	CHECKED
[2.1]	[2.2]	DECIMALS .XX ±.015 .XXX ±.010 ANGLES ±0.5°	BROWNELL Ltd. LONDON NW10		LJ	
EST. WT. —		DIMENSIONS IN INS/mm: INS; SCALE (ORIGINAL): 2:1	TITLE: HUMIDITY INDICATOR PLUG		DRAWING NUMBER: BL/D 9188/01 INST	

The Information in this brochure is accurate as of time of going to print. CP Cases reserve the right to make changes without prior notice due to industry conditions. CP accepts no liability for any errors found in this document.

ISOQAR QUALITY ASSURED ISO 9001 — UKAS QUALITY MANAGEMENT 026